


# CRANE SCALE (PRINTER)

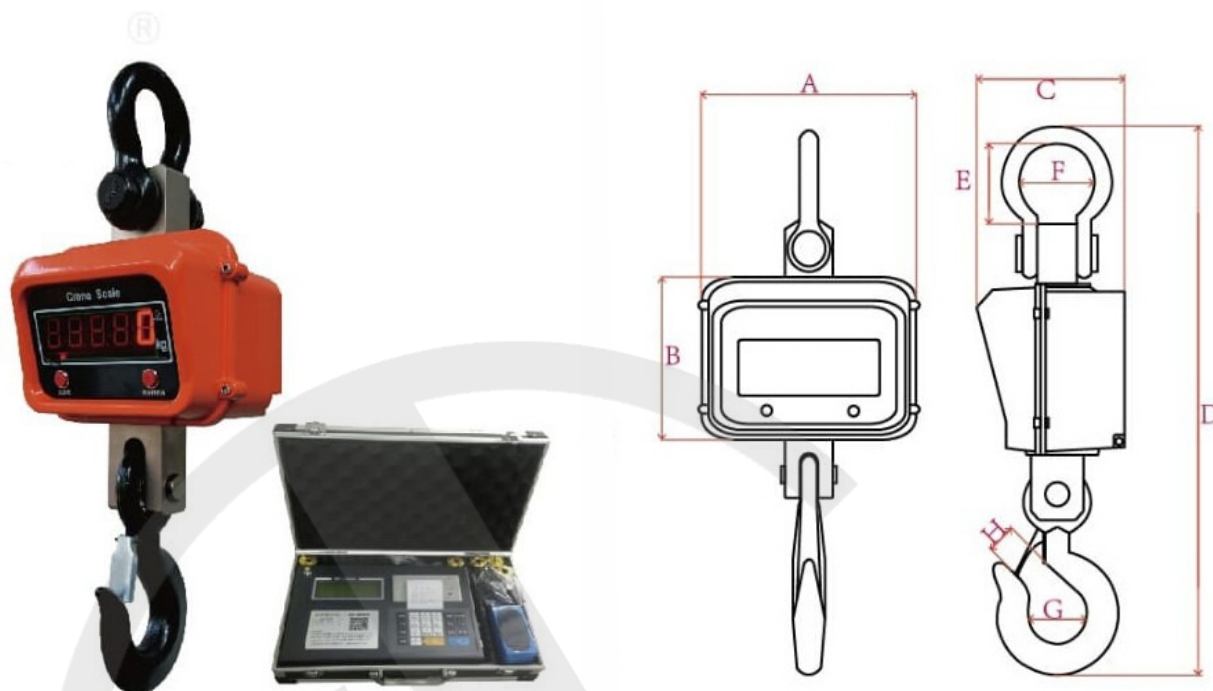

Model	Capacity kg	Division kg	Counts	Dimension( mm)								Weight kg
				A	B	C	D	E	F	G	H	
OCS-2T	2000	1	2000	255	190	205	580	70	67	46	35	13.5
OCS-3T	3000	1	3000	255	190	205	580	70	67	46	35	13.5
OCS-5T	5000	2	2500	255	190	205	680	88	73	60	45	18.5
OCS-10T	10000	5	2000	255	190	205	780	114	92	71	59	30
OCS-15T	15000	5	3000	255	190	205	830	120	97	77	65	36.5

## \* Description

- ★ Capacity: 0–12mV
- ★ A/D convert speed: 100time/second
- ★ A/D convert code: 1 million
- ★ Non-linearity:  $\leq 0.01\%$ F.S
- ★ zero drift:  $\leq 0.1\mu$  V/°C
- ★ TC rated load: 5ppm/°C
- ★ Minimum resolution: 0.1u V/d
- ★ Load cell excitation: DC5V
- ★ Wireless frequency: 433MHZ with 32 channels selectable
- ★ Wireless distance: not less than 200m if no obstacle
- ★ Serial communication: RS-232 & 20mA current loop
- ★ Baud rate: 1200、2400、4800、9600bps optional
- ★ Display standby time once charged:  $\leq 50$ h ( serial com port )
- ★ Working temp:  $-40$ – $+85$ °C
- ★ Outer size: 260\*185\*55mm

## \* Specification :

Accuracy	OIML(III)
Tare range	100%F.S.
Stable time	5-8s
Safe overload	120%F.S.
Ultra overload	500%F.S.
Overload	100%F.S.
Battery	6V/4AH
Zero range	4%F.S.
Continues working time	>100h

## \* Features :

- ★ Precision die-cast aluminum alloy case, master without display
- ★ Integrated loadcell design
- ★ High strength load components
- ★ American Standard movable rings
- ★ Fully sealed, maintenance-free rechargeable battery
- ★ Max. capacity: 15T

H. O. Unit -I : C-15/16, Nand Jyot Industrial Estate, Andheri-Kurla Road, Mumbai - 400072 ,  
Tel : (022) 42469700-30  
E-mail : sales@socgroup.in  
Visit us at : www.speedocontrols.com , www.socremote.com

Unit - II: Plot No. 4912, G. I. D. C., Phase IV, Vatva, Ahmedabad - 382445  
Tel.: (079) 68169700/702/712,  
E-mail : enquiry2@socgroup.in

**SPEED-O-CONTROLS**  
**PVT. LTD.**  
**LOADCELL SOLUTIONS**

JAN, 2020